



The Number One VERSATILE  
Choice For Builders!



Contact:



876-318-1504  
876-233-9557



[matthewsandclarke.com](http://matthewsandclarke.com)



[info@matthewsandclarke.com](mailto:info@matthewsandclarke.com)

Distributed by *Matthews & Clarke Limited*



**VersaFelt**  
*Underlayment*



# VersaFelt Underlayment



**VERSAFELT SYNTHETIC ROOFING UNDERLAYMENT** is designed to be used under asphalt shingles, stone coated metal roof tiles, standing seam, industrial sheetings, prepainted metal tiles & more.

## Features & Benefits

- Durable and Lightweight Rolls
- Non- Breathable
- Holds Up Through Wind Exposure
- Dynamic Flexibility
- Easy To Install
- Safe To Walk On During Installation
- Slip Resistant Surface

***TIP - Tear & Rip Resistant.**  
This reduces waste & prevents costly call backs due to leaks.*

## Product Dimensions

Area /Roll	1000 sq. ft - in all colours except blue (500 sq. ft)
Rolls/ Pallet	56
Pallet Size	40 x 48 in. (102 x 122 cm)
Length	250 ft (76.2m)
Width	48 in ( 1,219 mm)
Lap Line	4 in (102 mm)



VersaFelt Installed On Roof

Available In The Following Colours



### VERSAFELT ULTRALITE

- Lightweight for easy handling
- High tear resistance
- Ideal for general applications



### VERSAFELT REGULAR

- Enhanced durability
- Superior water barrier
- Proven field performance



### VERSAFELT REFLECT


- Advanced heat-reflective surface
- Improved energy efficiency
- Durable construction



## Installation Requirements

Proper installation is critical for performance. Ensure the following:

1. **Ventilation-** the space beneath the roof must be thoroughly ventilated according to the local building codes.
2. **Laps:** Maintain a minimum 4 inch side lap and 6- inch end lap.
3. **Fastening-** Use roofing / clout nails or staples with one- inch diameter plastic or metal caps.

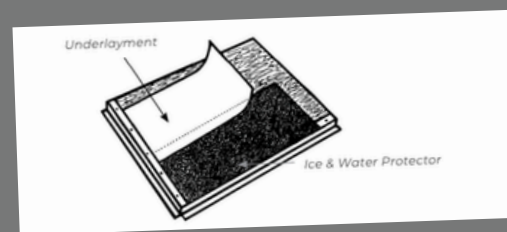

## Safety Information

- Do not install until all appropriate safety precautions are in place.
- Always wear personal protective equipment.
- Utilize appropriate fall protection equipment.